
PowerTech[™] 4045TFM85 Diesel Engine

Marine Propulsion Engine Specifications



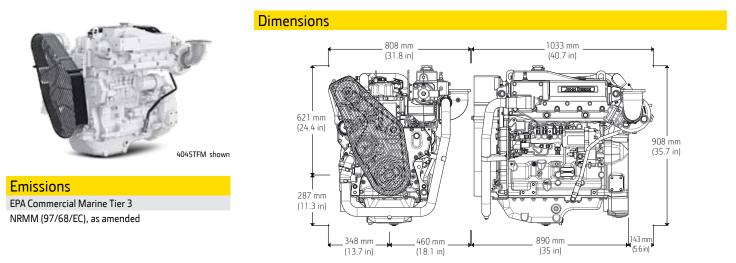

Dimensions shown in mm (in) may vary according to options selected. Contact your distributor for more information.

Weight, dry – kg (lb)

General Data (based on standards option configuration)							
Model	4045TFM85	Length maximum – mm (in)	1033 (40.7)				
Number of cylinders	4	Length to rear face of flywheel housing – mm (in)	890 (35)				
Displacement – L(cu in)	4.5 (275)	Flywheel housing SAE	SAE #3				
Bore and Stroke – mm (in)	106 x 127 (4.17 x 5)	Width maximum – mm (in)	808 (31.8)				
Engine Type	In-line, 4-cycle	Crankshaft centerline left – mm (in)	348 (13.7)				
Aspiration	Turbocharged and air-to-coolant aftercooled	Crankshaft centerline right – mm (in)	460 (18.1)				
		Height – mm (in)	908 (35.7)				
Classification Societies		Height, crankshaft centerline to top – mm (in)	621 (24.4)				
XXX Flag for Heather. If accessories available, add disclaimer to bottom		Height, crankshaft centerline to bottom – mm (in)	287 (11.3)				

XXX Flag for Heather. If accessories available, add disclaimer to XXXX

Engine Specifications			
Performance ratings	Power kW (bhp)	Rated Speed (rpm)	Rated fuel consumption L/hr (gal/hr)
M1	75 (100)	2400	21.5 (5.7)
M2	93 (125)	2500	29.0 (7.7)

Metric hp = Brake hp x 1.01387

M rating	M1	M2	M3	M4
Typical load factor	>65%	<=65%	<=50%	<=40%
Typical Annual Usage (hr)	Unrestricted	3,000-5,000	2,000-4,000	1,000-3,000
Typical full-power operation (hr)	Uninterrupted	16 of each 24 hr	4 of each 12 hr	1 of each 12 hr

Ratings are based on ISO 8655 standard power rating and the SAE J1228 crankshaft power rating.

Flexibility of installation due to range of options

See your John Deere Power Systems engine distributor or marine dealer for more detailed performance information.

507 (1117)

Features and Benefits

High torque and low rated RPM

- High torque provides excellent vessel control and maneuverability
- Lower rated propulsion RPM reduces vibration and noise for improved crew comfort

Integrated heat exchanger

- Integrated expansion tank, heat exchanger, and exhaust manifold reduce the chance of leaks
- High-capacity heat exchanger provides reliable operation in adverse conditions

Keel-cooled or heat exchanger

- Closed cooling system in keel-cooled engine option eliminates the need for a sea strainer, seawater pump, or anodes
- Heat exchanger option offers a lighter, more compact, and simpler engine installation

Internal balancers

 Internal balancers reduce engine noise and vibration for crew comfort John Deere 4045 engines only

High-pressure common-rail (HPCR)

- The HPCR fuel system provides variable common-rail pressure, multiple injections, and higher injection pressures
- Controls fuel injection timing and provides precise control for the start, duration, and end of injection
- Electronic transfer pump is self-priming for ease of maintenance
- Provides high performance, excellent fuel economy, and low emissions

Water-cooled exhaust manifold

- Integrated components eliminate external hoses and fittings
- Wet exhaust manifold creates a cooler and quieter environment for passengers and crew

Replaceable cylinder liners

- Replaceable wet-type cylinder liners are precision-machined and hardened for long life
- Allows engine to be rebuilt to original specifications

Electronic engine control unit (ECU)

- Advanced fault code diagnostics and customizable engine protections ensure reliability and uptime
- Provides highly customizable features and trim to integrate your vessel

Multiple service options

 Either-side oil fill/dipstick combinations and remote oil and fuel filter options are available for easier service access

John Deere Power Systems 3801 W. Ridgeway Ave. PO Box 5100 Waterloo, IA 50704-5100 Phone: 800.553.6446 Fax: 319.292.5075 John Deere Power Systems Usine de Saran La Foulonnerie B.P. 11.13 45401 Fleury les Aubrais Cedex France Phone: 33.2.38.82.61.19 Fax: 33.2.38.82.60.00 All values at rated speed and power with standard options unless otherwise noted. Specifications and design subject to change without notice.